


# SunSmart Domestic Series Air Source Heat Pump



Model		SSD-0360-410A	SSD-0540-410A	SSD-1320-410A	SSD-1800-410A
Heating capacity	W	3600	5400	12000	17500
COP	W/W	4,18	4,15	4,16	4.1
Rated water temp	°C	55	55	55	55
Max water temp	°C	60	60	60	60
Noise level	dB	48	48	53	60
Running ambient temp.	°C	(-7~43)			
Max. current	A	6,8	9	23	12,3
Max. power	W	1350	2000	4680	6900
Heating water capacity	L/h	80	120	285	375
Refrigerant		R410A			
Dimension	mm	936(A)×311(C)×550(B)	936(A)×311(C)×550(B)	986(A)×380(C)×798(B)	752(A)×691(C)×1055(b)
Mounting Dimension	mm	650(D)×143(E)×385(F)	650(D)×143(E)×385(F)	680(D)×183(E)×420(F)	Vertical floor standing
water pressure drop	KPA	35	35	40	50
Circulation pump	mm	Female 22	Female 22	Female 22	Male 25mm
Noise (dB)	dB	48	48	53	60
Net weight	kg	50	54	85	160
Power supply	V/Hz/Ph	220~/50/1	220~/50/1	220~/50/1	380-415V~/50/3
Casing		galvanized sheet powder coated			

Heating capacity @ air 20°C/15°C; water temperature from 15°C-55°C

## Dimensions

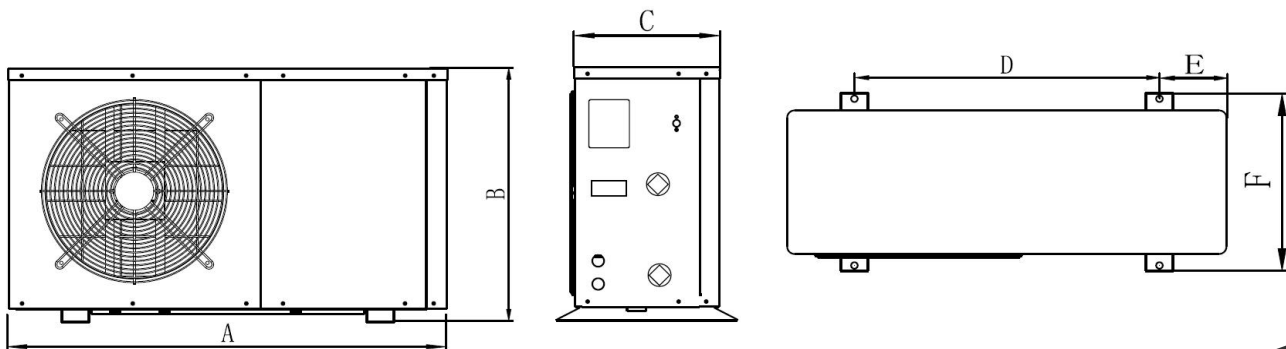

In the interest of performance and durability improvements, SunScan reserves the right to change any specifications at any time without notice.

**SUNSCAN**<sup>TM</sup>  
SOLAR ENERGY TECHNOLOGIES

Enquiries - 021 551 5906  
[www.sunscan.co.za](http://www.sunscan.co.za)